


Technical Data

Xact Smart

	Xact Smart 100/3100	Xact Smart 160/3100	Xact Smart 225/4100	
Length	3900	3950	4950	mm
Width	1485	4500	1510	mm
Height	2720	2720	2890	mm

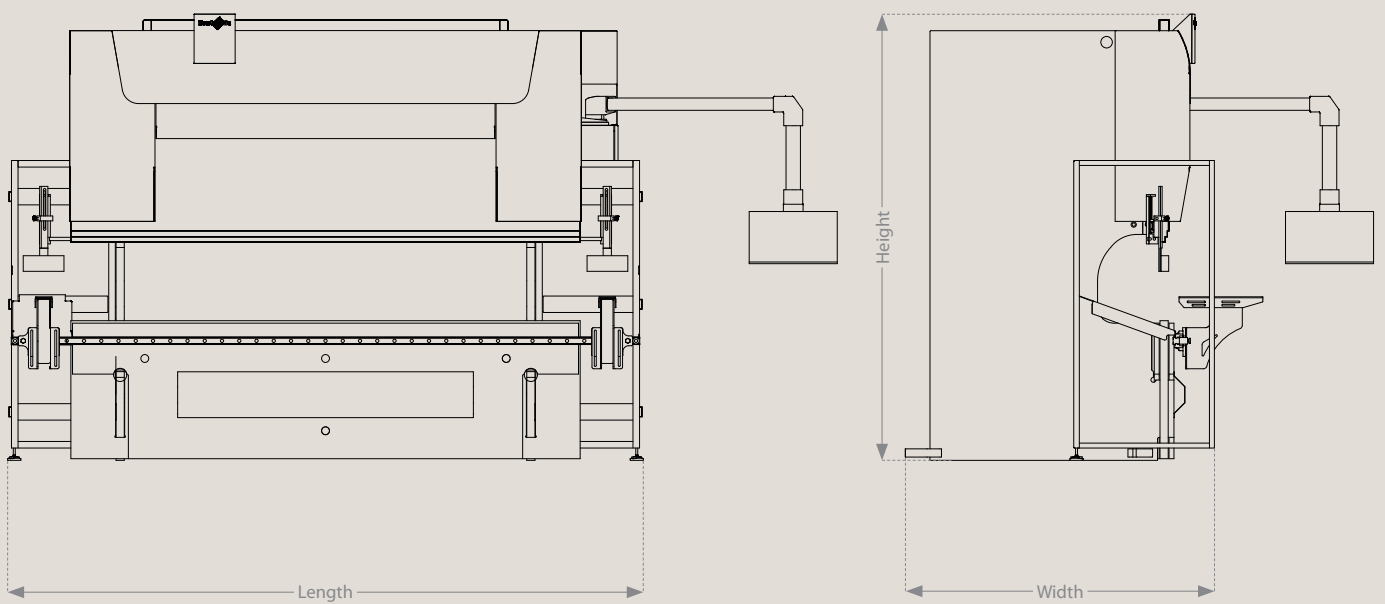

Type	Xact Smart 100/3100	Xact Smart 160/3100	Xact Smart 225/4100	
Tonnage	1000	1600	2250	kN
Bending length	3100	3100	4100	mm
Standard stroke	200	200	200	mm
Open height	480	480	480	mm
Distance between the side stands	2450	2450	3420	mm
Throat	400	400	400	mm
Table width	60	60	60	mm
Max. backgauge range in X	800	800	800	mm
X-axis travel	600	600	600	mm
X-axis speed	400	400	400	mm/s
X-axis accuracy	± 0,05	± 0,05	± 0,05	mm
R-axis travel	150	150	150	mm
R-axis speed	100	100	100	mm/s
R-axis accuracy	± 0,05	± 0,05	± 0,05	mm
Z-axis travel	1830	1830	2880	mm
Z-axis speed	400	400	400	mm/s
Max. Y-rapid traverse	140	140	140	mm/s
Max. Y-working speed	10	10	10	mm/s
Y-axis accuracy	± 0,01	± 0,01	± 0,01	mm
Oil capacity	250	250	350	l
Main motor power	7,5	11	15	kW
Weight	9	10,5	15	t

The right to make changes to dimensions, construction, and equipment is reserved. ISO-9001-certified.

Bystronic: Best choice.

Laser | Bending | Waterjet
bystronic.com